

REMOVING - REFITTING : PROTECTIVE PANEL UNDER THE ENGINE WITHOUT LOWER CHANNEL

URGENT : Observe the safety and cleanliness recommendations  .

1. Removing

Put the vehicle on a hoist.

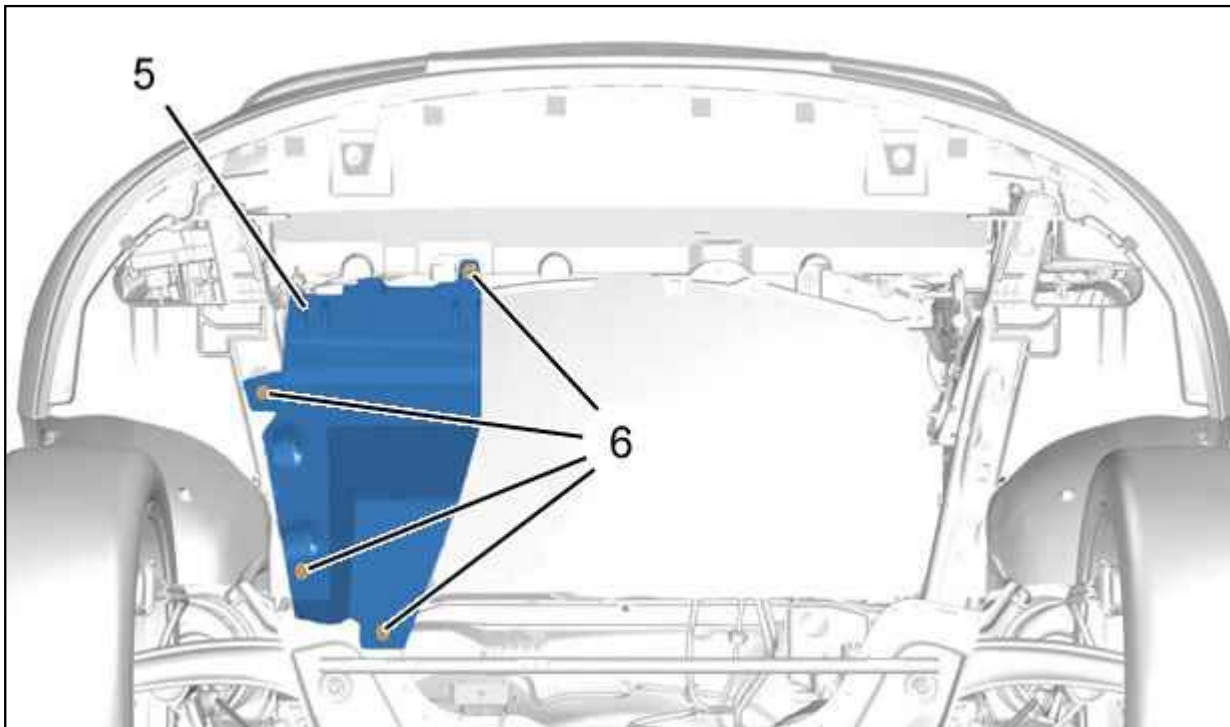


Figure : C5JG09QD

Remove :

- The bolts (6)
- The protective panel under the engine (5)

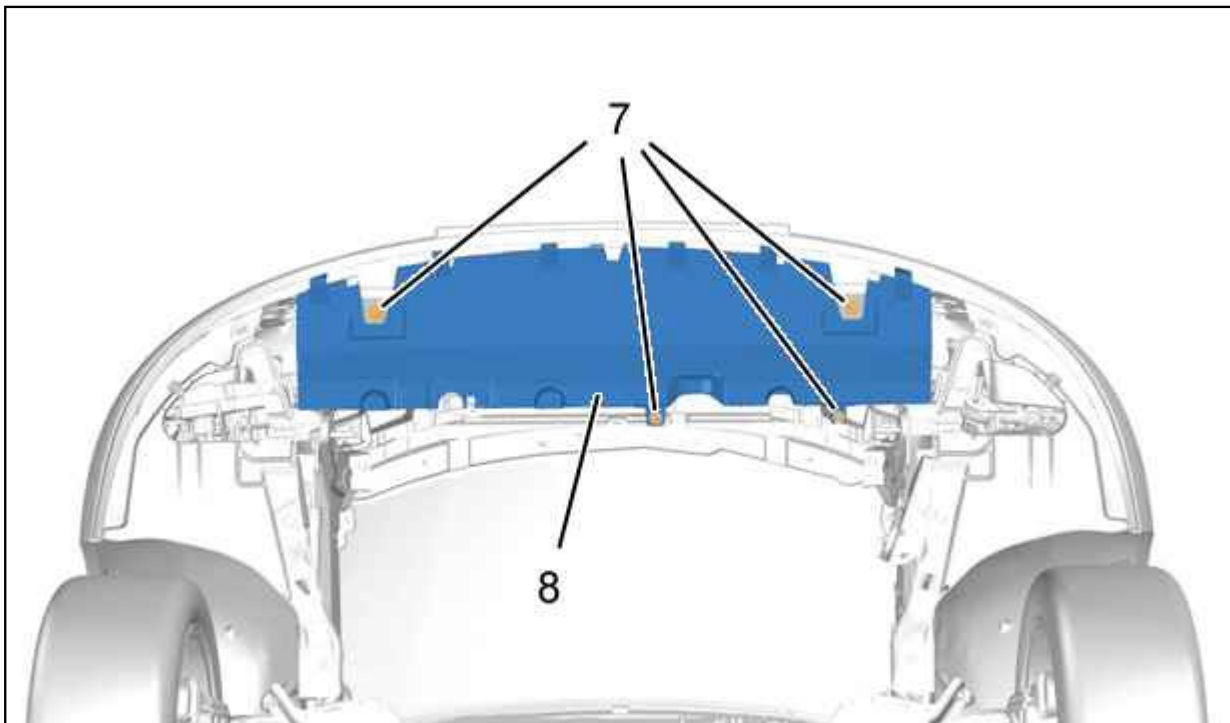


Figure : C5JG09TD

Remove :

- The bolts (7)
- The deflector (8)

2. Refitting

Proceed in the reverse order to removal.

Tighten the screws (6), (7) to $2 \pm 0,4$ m.daN .